




Extender-FE10P



◆ Key Features

- ▮ Data and PoE Extension up to 100M
- ▮ Support Short Circuit Protection

◆ Mechanical Dimension

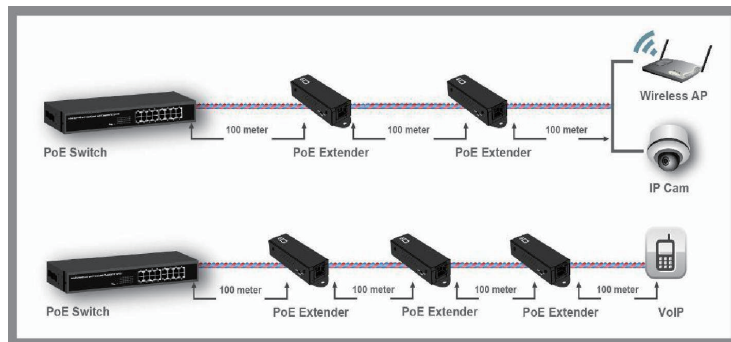

PoE Extender

◆ Technical Specifications

Model		Extender-FE10P
Data Rate		10/100 Mbps half/full duplex
Connectors		RJ45
Network Cables		Cat5e or better
PoE On/Off Switch		For turning PoE off manually
LED indicator		PoE / Data
Mounting		Wall
Environment	Operating Temperature / Humidity	0°C ~ +50°C / 10% to 90% RH (non-condensing)
	Storage Temperature / Humidity	-20°C to +70°C / 10% to 90% RH (non-condensing)
Dimensions		102.8 × 28.8 × 20 mm
Certification		CE, FCC Class A

PoE Source	Number of PSD-211	Distance (m)	PD voltage (V)	PD Max power (W)	Topology
PoE switch	1	200	43.9	25.46W	PoE Switch — PSD-211 — Powered Device
	2	300	39.7	22.28W	PoE Switch — PSD-211 — PSD-211 — Powered Device
	3	400	35.8	19.33W	PoE Switch — PSD-211 — PSD-211 — PSD-211 — Powered Device
	4	500	31.5	16.38W	PoE Switch — PSD-211 — PSD-211 — PSD-211 — PSD-211 — Powered Device
	5	600	27.4	13.97W	PoE Switch — PSD-211 — PSD-211 — PSD-211 — PSD-211 — PSD-211 — Powered Device

■ Specifications are subject to change without prior notice.