




FXS1216S



◆ Key Features

- ↳ The Most Cost-Effective SAN Storage Solution
- ↳ Built-in High-Speed 10GbE LAN Ports
- ↳ Easy File Access with Quick Connection
- ↳ Fully Redundant Modular Design
- ↳ Reliable and Advanced Protection Mechanism
- ↳ Dual-Active controller SAN system has four 10GBASE-T iSCSI ports reaching 40Gb/s bandwidth when you aggregate all ports together.

◆ Mechanical Dimension

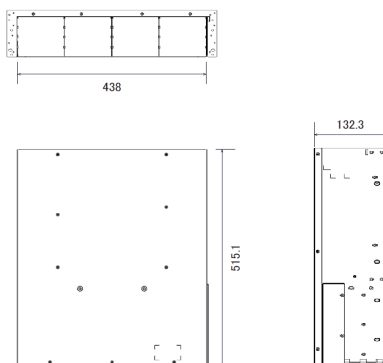

iSCSI 3U 16 Bay Rackmount Storage

◆ Technical Specifications

Model	FXS1216S
CPU	Intel® 64bit Dual-Core Processor
Form Factor	19" Rackmount 3U 16 Bay
Drive Bays	3.5" Slot x 16
Drive Bays	6Gb/s SATA, 12Gb/s SAS
Maximum Drive Bays with Expansion Unit	616
Memory	4GB DDR4 ECC DIMM
Expansion Port	Built-in 2x12Gb/s SAS wide ports (SFF-8644)
Power Frequency	50-60 Hz, Single Phase
Host Interface	iSCSI(10GbE ports x2)
RAID	0, 1, 0+1, 3, 5, 6, 10, 30, 50, 60, JBOD, N-way mirroring Support
External Ports	1x USB 2.0 ;1x UPS Port ;1x Console Port
Cooling fan	4 pcs (Hot Swappable Drive/Redundant Power Supply)
Network	DHCP, Static IP, NTP, Port TrunkingLACP, VLAN, Jumbo Frame
Event Notification Service	Email, SNMP traps, Windows browser popup, Syslog, Windows Messenger
Voltage	100-240V (770W x 2 / 850W x 2 (80 PLUS Platinum))
Power Consumption	534W
Temperature	Operating: 0°C ~ 40°C (32°F ~ 104°F)
Humidity	Operating: 20% to 80% (non-condensing)
Dimensions (H x W x D)	130.4 x 438 x 515 mm
Weight (without HDD)	21.7 kg
Certifications	CE, FCC, BSMI, VCCI, KCC

■ Specifications are subject to change without prior notice.