




IPB-1080F28X



◆ Key Features

- └ 1/2.7 Megapixel CMOS sensor
- └ 1920x1080@30fps (1080P) / H.264, M-JPEG
- └ Day & Night Switch Time Control Manual
- └ Digital Wide Dynamic Range
- └ Support Power over Ethernet
- └ Support iPhone / iPad / Android

◆ Mechanical Dimension

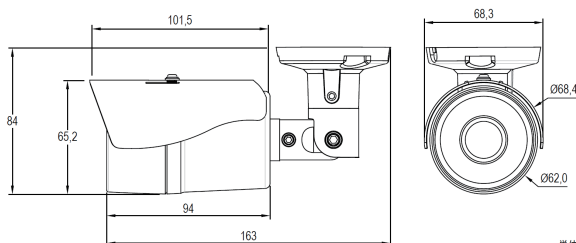

H.264 2MP Full HD IR Mini Waterproof Bullet Network Camera

◆ Technical Specifications

Model	IPB-1080F28X
Image Sensor	1/2.7" 2 Megapixel CMOS sensor
Video Resolution	1920x1080, 1280x720, 640x360, 320x240, 176x144
Video Compression	H.264, M-JPEG
Video Frame Rate	Up to 30fps for All Video
Lens ; Angle of View	f2.8mm/F1.8 ; 101°(H) x 64°(V)
S/N ratio	50dB
IR LED units	6 Units High Power
IR LED Working Distance	30M
Minimum Illumination (AGC ON)	Color : 0.1 Lux (IR Off), B / W: 0.05 Lux (IR ON)
Electronic Shutter	AUTO ; 1/30 ~ 1/250 sec.
ICR	Mechanism IR Cut Filter
Day&Night Mode	Yes
Wide Dynamic Range	Yes
FLK	Yes
White Balance	Yes
DNR	2D/3D
Analog Output	N/A
Audio	N/A
Maximum concurrent access number	10
Alarm In / Alarm Out	DI / DO
Ethernet	10/ 100 Base-T
Network Protocols	IPv6, IPv4, HTTP, HTTPS, SNMP, QoS/DSCP, Access list, IEEE 802.1X, RTSP, TCP/ IP, UDP, SMTP, FTP, PPPoE, DHCP, DDNS, NTP, UPnP, 3GPP, SAMBA, Bonjour, Google drive, Drop box, Onvif profile S
Supported Browser	Window 7, 8, 10, XP, Microsoft IE 6.0 or above
External Storage	Micro SD
Water Resistance	IP66
Language	English / Japanese / Chinese (Traditional, Simplified) / Russian / French / Italian / German / Spanish / Polish / Portuguese
Power Supply ; Consumption	PoE / DC12V ; PoE: 4.5W (IR on) / DC12V: 3.5W (IR on)
Operating Temperature ; Humidity	50°C(IR on), -10°C ~ 60°C(IR off)/ 90%
Dimensions	68.4mm(DIA) x 101.5mm(H)
Net Weight	480g

◆ Specifications are subject to change without prior notice.