




IPB-2065BM



◆ Key Features

- └ 1/2.9" 2 Megapixel Exmor-R CMOS sensor
- └ 1920x1080@30fps (1080P) ; H.265,H.264, M-JPEG
- └ Support Micro SD Card for backup
- └ 2D/3D Digital Noise Reduction
- └ Support Power over Ethernet / 12Vdc Power Input
- └ Support iPhone / iPad / Android

◆ Mechanical Dimension

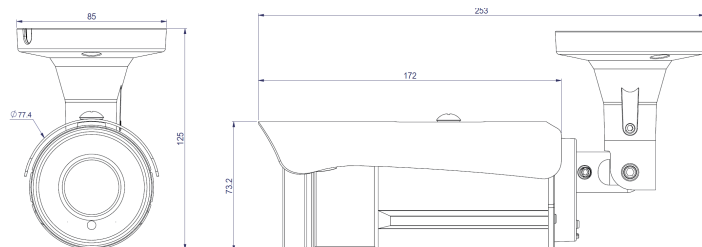

H.265 2MP Full HD IR Waterproof Bullet Network Camera

◆ Technical Specifications

Model	IPB-2065BM
Image Sensor	1/2.9" 2 Megapixel Exmor-R CMOS sensor
Video Resolution	1920x1080, 1280x720, 640x360, 320x240, 176x144
Video Frame Rate	Up to 30fps for All Video
Video Compression	H.265,H.264,M-JPEG
Sensitivity(AGC On)	Color : 0.05 Lux (IR Off), B / W : 0.01 Lux (IR ON)
Wide Dynamic Range	Yes
Second Video Output	Yes (BNC)
Mechanical IR Cut Filter	Automatically Switches
IR LED ; Working Distance	5 units ; 30m
S/N Ratio	50dB
Day&Night Mode	Yes
Electronic Shutter	1/30, 1/50(60), 1/100, 1/125, 1/250, 1/500, 1/1000 sec.
White Balance	Yes
DNR ; Sense Up	2D/3D ; Yes
Language	English / Japanese / Chinese (Traditional, Simplified) / Russian / French / Italian / German / Spanish / Polish / Portuguese
Image Setting	Brightness, Contrast, Hue, Saturation, Sharpness, AGC, Shutter Time, D-WDR, Anti Fog, Lens Distortion Correction, Flip, Mirror, Red/Blue Gain, Day&Night, DeNoise
Motion Detection	Yes
Supported Protocols	IPv6, IPv4, HTTP, HTTPS, SNMP, QoS/DSCP, Access list, IEEE 802.1X, RTSP, TCP/ IP, UDP, SMTP, FTP, PPPoE, DHCP, DDNS, NTP, UPnP, 3GPP, SAMBA, Bonjour
Video Streaming	H.265/H.264/ M-JPEG
Audio Streaming ; I/O	G.711(64K) / G.726(32K,24K) ; 3.5mm phone jack
Alarm In / Alarm Out	DI / DO
Lens ; Angle of View (H)	f2.8~12mm/F1.4 ; 34° ~ 100° (H) / 19° ~ 52° (V)
Water Resistance	IP66
Power Supply ; Consumption	PoE / 12Vdc ; PoE: 7.0W (IR LED on) / 12Vdc: 5.5W (IR LED on)
Operating Temperatur	-20°C ~ 70°C
Dimensions	77.4mm(DIA) x 172mm(H)
Net Weight	1100 g

■ Specifications are subject to change without prior notice.