




IPB-2065BM-M



◆ Key Features

- ┌ 1/2.9" 2 Megapixel Exmor-R CMOS sensor
- ┌ Resolution 2M@30fps / Full HD@30fps
- ┌ Support H.265, H.264, M-JPEG Compression
- ┌ Support Micro SD Card for backup
- ┌ Support Power over Ethernet / 12VDC Power Input
- ┌ Support iPhone / iPad / Android
- ┌ Support Optical Motorized Zoom

◆ Mechanical Dimension

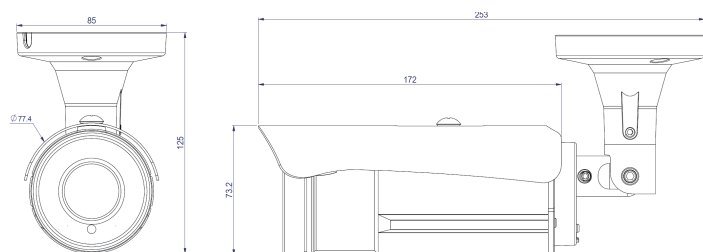

2MP H.265 IR Waterproof Bullet Network Camera

◆ Technical Specifications

Model	IPB-2065BM-M
Image Sensor	1/2" 9 2 Megapixel Exmor-R CMOS sensor
Video Resolution	2592x1520, 1920x1080, 1280x720, 640x360
Video Compression	H.265, H.264, M-JPEG
Video Frame Rate	Up to 30fps for All Video
Lens ; Angle of View	f2.8-12mm 4.2X Motorized/F1.4 ; 35° ~ 95° (H) / 19° ~ 50° (V)
S/N ratio	50dB
IR LED units	5 Units High Power
IR LED Working Distance	30M
Minimum Illumination (AGC ON)	Color : 0.05 Lux (IR Off), B / W: 0.01 Lux (IR ON)
Electronic Shutter	AUTO ; 1/30 ~ 1/10000 sec.
ICR	Mechanism IR Cut Filter
Day&Night Mode	Yes
Wide Dynamic Range	Yes
FLK	Yes
White Balance	Yes
DNR	2D/3D
Analog Output	Yes (BNC)
Audio	Input ×1, Output ×1 ; G.711 / G.726
Maximum concurrent access number	10
Alarm In / Alarm Out	DI / DO
Ethernet	10/ 100 Base-T
Network Protocols	IPv6, IPv4, HTTP, HTTPS, SNMP, QoS/DSCP, Access list, IEEE 802.1X, RTSP, TCP/ IP, UDP, SMTP, FTP, PPPoE, DHCP, DDNS, NTP, UPnP, 3GPP, SAMBA, Bonjour, Google drive, Drop box, Onvif profile S
Supported Browser	Window 10, XP, Microsoft IE 11.0 or above
External Storage	Micro SD
Water Resistance	IP66
Language	English / Japanese / Chinese (Traditional, Simplified) / Russian / French / Italian / German / Spanish / Polish / Portuguese
Power Supply ; Consumption	PoE / DC12V ; PoE: 7.0W (IR LED on) / DC12V: 5.5W (IR LED on)
Operating Temperature ; Humidity	-20°C ~ 70°C / 90%
Dimensions	77.4mm(DIA) x 172mm(H)
Net Weight	1100g

■ Specifications are subject to change without prior notice.