




IPD-2065CD-M



◆ Key Features

- └ 1/2.9" 2 Megapixel CMOS sensor
- └ 1920x1080@30fps (1080P) ; H.265,H.264, M-JPEG
- └ Support Micro SD Card for backup
- └ 2D/3D Digital Noise Reduction
- └ Support Power over Ethernet / 12Vdc Power Input
- └ Support iPhone / iPad / Android

◆ Mechanical Dimension

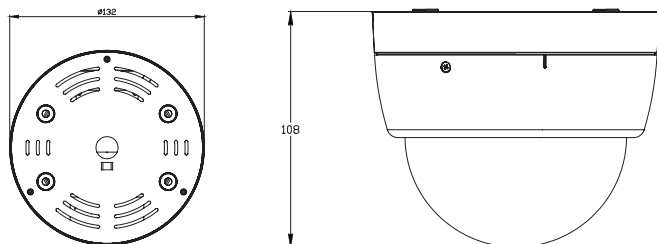

H.265 2MP Full HD IR Dome Network Camera

◆ Technical Specifications

Model	IPD-2065CD-M
Image Sensor	1/2.9" 2 Megapixel CMOS sensor
Video Resolution	1920x1080, 1280x720, 640x360, 320x240, 176x144
Video Frame Rate	Up to 30fps for All Video
Video Compression	H.265,H.264, M-JPEG
Sensitivity(AGC On)	Color : 0.05 Lux (IR Off), B / W : 0.01 Lux (IR ON)
Digital Wide Dynamic Range	8 Levels (Adjustable Level Settings)
Second Video Output	Yes (BNC)
Mechanical IR Cut Filter	Automatically Switches
IR LED ; Working Distance	4 units ; 25m
3-Axis Adjustments Angle	Pan: 355°, Tilt: 70°, Rotation: 180°
Day&Night Mode	Yes
Electronic Shutter	1/30~1/10000 sec.
White Balance	Yes
DNR ; Sense Up	2D/3D ; Yes
Language	English / Japanese / Chinese (Traditional, Simplified) / Russian / French / Italian / German / Spanish / Polish / Portuguese
Image Setting	Brightness, Contrast, Hue, Saturation, Sharpness, AGC, Shutter Time, D-WDR, Anti Fog, Lens Distortion Correction, Flip, Mirror, Red/Blue Gain, Day&Night, DeNoise
Motion Detection	Yes
Supported Protocols	IPv6, IPv4, HTTP, HTTPS, SNMP, QoS/DSCP, Access list, IEEE 802.1X, RTSP, TCP/ IP, UDP, SMTP, FTP, PPPoE, DHCP, DDNS, NTP, UPnP, 3GPP, SAMBA, Bonjour
Video Streaming	H.265/H.264/ M-JPEG
Audio Streaming ; I/O	G.711(64K) / G.726(32K,24K) ; External Mic In / External Audio Out
Alarm In / Alarm Out	DI / DO
Lens ; Angle of View	f2.8~12mm 4.2X Motorized/F1.4 ; 35° ~ 95° (H) / 19° ~ 50° (V)
Water Resistance	N/A
Power Supply ; Consumption	PoE / DC12V ; PoE: 6.5W (IR LED on) / DC12V : 5.5W (IR LED on)
Operating Temperatur	-20°C ~ 50°C
Dimensions	132mm(DIA) x 108mm(H)
Net Weight	485 g

■ Specifications are subject to change without prior notice.