




IPE-2065BM-M



◆ Key Features

- └ 1/2.8" Megapixel CMOS sensor
- └ Resolution 2M@30fps
- └ Support H.265, H.264, M-JPEG Compression
- └ Support Power over Ethernet / 12VDC Power Input
- └ Support iPhone / iPad / Android
- └ Support Optical Motorized Zoom
- └ Housing made of AISI 316L stainless steel

◆ Mechanical Dimension

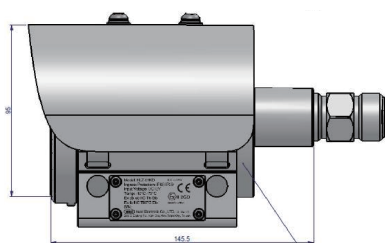

Internal Volume is 339.8 cm³

2MP H.265 4.2x Optical Zoom Lens Explosion-Proof Bullet Network Camera

◆ Technical Specifications

Model	IPE-2065BM-M
Image Sensor	1/2.8" Megapixel CMOS sensor
Video Resolution	1920x1080, 1280x720, 640x360
Video Compression	H.265, H.264, M-JPEG
Video Frame Rate	1920x1080@30fps, 1280x720@30fps 640x360@30fps, 320x240@30fps
Lens ; Angle of View	f2.8-12mm 4.2X Motorized/F1.4 ; 36° ~ 98° (H) / 19.7° ~ 52.3° (V)
S/N ratio	50dB
IR LED units	N/A
IR LED Working Distance	-
Minimum Illumination	Color : 0.005 Lux (IR Off), B / W: 0.001 Lux (IR ON)
Electronic Shutter	AUTO ; 1/1 ~ 1/10000 sec.
ICR	Mechanism IR Cut Filter
Day&Night Mode	Yes
Wide Dynamic Range	Yes
FLK	Yes
White Balance	Yes
DNR	2D/3D
Analog Output	Yes (BNC)
Audio	Input ×1, Output ×1 ; G.711 / G.726
Maximum concurrent access number	10
Alarm In / Alarm Out	DI x1 / DO x1
Ethernet	10/ 100 Base-T
Network Protocols	IPv6, IPv4, HTTP, HTTPS, SNMP, QoS/DSCP, Access list, IEEE 802.1X, RTSP, TCP/ IP, UDP, SMTP, FTP, PPPoE, DHCP, DDNS, NTP, UPnP, 3GPP, SAMBA, Bonjour
Wi-Fi	N/A
ONVIF	ONVIF2.4.2
Supported Browser	Window 7, XP, Microsoft IE 6.0 or above, Chrome, Safari, Firefox
External Storage	Built in Industrial 64 GB Micro SD Card (optional)
Water Resistance / Impact Resistance	IP69 / IK10
Explosion Proof Certification	ATEX : II 2G Ex db IIC T6 Gb / II 2D Ex tb IIIC T85°C Db IECEx: Ex db IIC T6 Gb / Ex tb IIIC T85°C Db
Language	English / Japanese / Chinese (Traditional, Simplified) / Russian / French / Italian / German / Spanish / Polish / Portuguese
Power Supply ; Consumption	PoE / DC12V ; PoE: 2.88W / DC12V: 2.28W
Operating Temperature ; Humidity	-40°C ~ 70°C / 90%
Dimensions	Φ95mm x 145.5mm
Net Weight	3.8Kg

◆ Specifications are subject to change without prior notice.