




### IPV-4065CD-M



#### ◆ Key Features

- └ 1/3" 4 Megapixel CMOS sensor
- └ Resolution 4M@25fps / Full HD@30fps
- └ Support H.265, H.264, M-JPEG Compression
- └ Support Micro SD Card for backup
- └ Support Power over Ethernet / 12Vdc Power Input
- └ Support iPhone / iPad / Android
- └ Support Optical Motorized Zoom

#### ◆ Mechanical Dimension

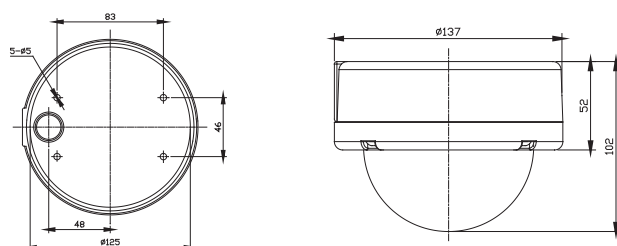

## 4MP H.265 IR Waterproof Dome Network Camera

#### ◆ Technical Specifications

Model	IPV-4065CD-M
Image Sensor	1/3" 4 Megapixel CMOS sensor
Video Resolution	2592x1520, 1920x1080, 1280x720, 640x360
Video Compression	H.265, H.264, M-JPEG
Video Frame Rate	2592x1520@25fps, 1920x1080@30fps, 1280x720@30fps, 640x360@30fps
Lens ; Angle of View	f2.8 ~ 12mm 4.2X Motorized/F1.4 ; 35° ~ 90° (H) / 24° ~ 49° (V)
S/N ratio	44dB
IR LED units	12 Units 5φ + 2 Units High Power
IR LED Working Distance	20M
Minimum Illumination	Color : 0.08 Lux (IR Off), B / W : 0.00 Lux (IR ON)
Electronic Shutter	AUTO ; 1/30 ~ 1/10000 sec.
ICR	Mechanism IR Cut Filter
Day&Night Mode	Yes
Wide Dynamic Range	Yes
FLK	Yes
White Balance	Yes
DNR	2D/3D
Analog Output	Yes (BNC)
Audio	Input ×1, Output ×1 ; G.711 / G.726
Maximum concurrent access number	10
Alarm In / Alarm Out	DI / DO
Ethernet	10/ 100 Base-T
Network Protocols	IPv6, IPv4, HTTP, HTTPS, SNMP, QoS/DSCP, Access list, IEEE 802.1X, RTSP, TCP/ IP, UDP, SMTP, FTP, PPPoE, DHCP, DDNS, NTP, UPnP, 3GPP, SAMBA, Bonjour
Wi-Fi	N/A
ONVIF	ONVIF2.4.2
Supported Browser	Window 7, XP, Microsoft IE 6.0 or above, Chrome, Safari, Firefox
External Storage	Micro SD
Water Resistance	IP66
Impact Resistance	IK10
Language	English / Japanese / Chinese (Traditional, Simplified) / Russian / French / Italian / German / Spanish / Polish / Portuguese
Power Supply ; Consumption	PoE / 12Vdc ; PoE: 6.24W (IR LED on) / 12Vdc: 4.92W (IR LED on)
Operating Temperature ; Humidity	-20°C ~ 60°C / 90%
Dimensions	137mm x 102mm
Net Weight	890g

■ Specifications are subject to change without prior notice.