




H.265 2MP PoE Outdoor IR LED Speed Dome Network Camera (10X)

◆ Technical Specifications

Model	ISP2065-10X
Image Sensor	1 / 2.8" 2 Megapixel CMOS Sensor
Video Resolution	1920x1080, 1280x720, 640x360, 320x240, 176x144
Video Frame Rate	Up to 30fps for All Video
Video Compression	H.265, H.264, M-JPEG
Minimum Illumination	Color:0.05Lux, B/W:0.001Lux, IR LEDs ON:0Lux
IR LED units	6 Units High Power
IR LED Working Distance	100m
DWDR Mode	Off / Low / Middle / High
Day&Night Mode	Auto / Color / B/W / Time Mode with auto ICR
Auto Electronic Shutter	1/30 ~ 1/10,000 sec
White Balance	Yes
DNR	2D / 3D
Language	English / Japanese / Chinese (Traditional, Simplified) / Russian / French / Italian / German / Spanish / Polish / Portuguese
Supported Protocols	IPv6, IPv4, HTTP, HTTPS, SNMP, QoS/DSCP, Access list, IEEE802.1X, RTSP, TCP/IP, UDP, SMTP, FTP, PPPoE, DHCP, DDNS, NTP, UPnP, 3GPP, SAMBA, Bonjour
Video Streaming	H.265, H.264 and M-JPEG Dual/Triple Streaming
Audio Streaming	N/A
Controls ; Auto Pan	PAN / TILT / ZOOM ; Yes
Patrol	8 groups with 24 point
Pan Range	360° Auto Flip
Pan Manual Control Speed	0.42°~25.8°/sec.
Tilt Range	90° Auto Flip
Tilt Manual Control Speed	0.31°~18.69°/sec.
Cruise	Yes, 8 groups
Home Position	Yes
Preset Positions	256 Positions
Lens / F value	10X Optical Zoom f5~50mm / F1.6~F1.8
Angle of View	3.7° ~ 57.5° (Horizontal) / 2° ~ 31.9° (Vertical)
Water Resistance	IP66
Power Supply ; Consumption	PoE / DC12V ; PoE: 12.3W / DC12V: 10.3W
Operating Temp.	-20°C ~ 60°C
Dimensions / Net Weight	135mm(DIA) x 198mm(H) / 1.8kg

◆ Specifications are subject to change without prior notice.

ISP2065-10X

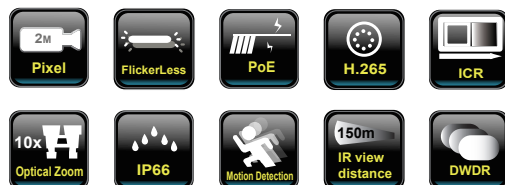

◆ Key Features

- └ 1 / 2.8" 2MP CMOS Sensor
- └ 1920x1080@30fps ; H.265, H.264, M-JPEG
- └ Support 3D / 2D Digital Noise Reduction
- └ Support iPhone / iPad / Android Smartphone
- └ Support Power over Ethernet (60W compliant)

◆ Mechanical Dimension

