





ISPD-2065-30X

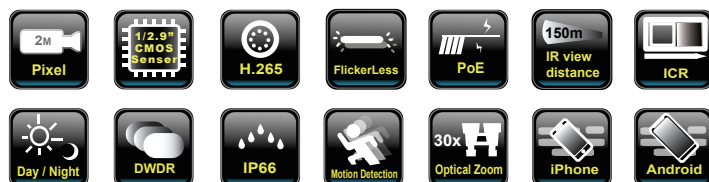

◆ Key Features

- └ 1/2.9" 2 Megapixel Exmor CMOS sensor
- └ Resolution full HD 1920x1080P@30fps
- └ Support H.265, H.264, M-JPEG Compression
- └ 2D/3D Digital Noise Reduction
- └ Support SD Card for backup
- └ Support Power over Ethernet / 12Vdc Power Input
- └ Support iPhone / iPad / Android

◆ Mechanical Dimension

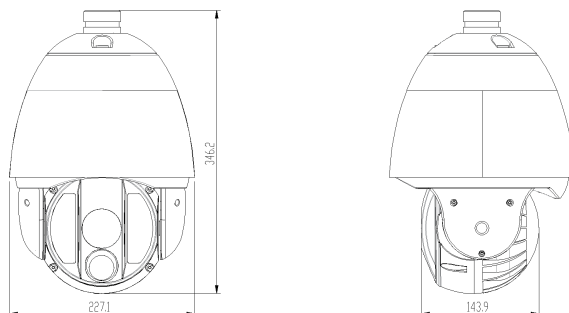

H.265 2MP PoE Outdoor IR LED Speed Dome Network Camera (30X)

◆ Technical Specifications

Model	ISPD-2065-30X
Image Sensor	1 / 2.9" 2 Megapixel CMOS Sensor
Video Resolution	1920x1080, 1280x720, 640x480, 320x240, 176x144
Video Frame Rate	Up to 30fps for All Video
Video Compression	H.265, H.264, M-JPEG
Minimum Illumination	Color:0.05Lux, B/W:0.005Lux, IR LEDs ON:0Lux
IR LED units	9 Units High Power
IR LED Working Distance	150m
DWDR Mode	Off / Low / Middle / High
Day&Night Mode	Auto / Color / B/W / Time Mode with auto ICR
Auto Electronic Shutter	1/30 ~ 1/5,000 sec
White Balance	Yes
DNR	2D / 3D
Language	English / Japanese / Chinese (Traditional, Simplified) / Russian / French / Italian / German / Spanish / Polish / Portuguese
Supported Protocols	IPv6, IPv4, HTTP, HTTPS, SNMP, QoS/DSCP, Access list, IEEE802.1X, RTSP, TCP/IP, UDP, SMTP, FTP, PPPoE, DHCP, DDNS, NTP, UPnP, 3GPP, SAMBA, Bonjour
Video Streaming	H.265, H.264 and M-JPEG Dual/Triple Streaming
Audio Streaming	G.711(64K) / G.726(32K,24K) ; 3.5mm phone jack
Controls ; Auto Pan	PAN / TILT / ZOOM ; Yes
Patrol	8 groups with 24 point
Pan Range	360° Auto Flip
Pan Manual Control Speed	0.42~25.8°/sec.
Tilt Range	90° Auto Flip
Tilt Manual Control Speed	0.31~18.69°/sec.
Cruise	Yes, 8 groups
Home Position	Yes
Preset Positions	256 Positions
Lens / F value	20X Optical Zoom f4.5~135mm / F1.6~F4.4
Angle of View	2° ~ 59° (Horizontal) / 1° ~ 40° (Vertical)
Water Resistance	IP66
Power Supply ; Consumption	PoE / DC36V ; PoE: 50W / DC36V: 50W
Operating Temp.	-20°C ~ 60°C
Dimensions / Net Weight	227mm(DIA) x 346mm(H) / 5.3kg

■ Specifications are subject to change without prior notice.