



## H.265 4MP PoE Outdoor IR LED Speed Dome Network Camera (10X)


### ISPD-4065-10X



#### ◆ Key Features

- 1/3" 4 Megapixel CMOS sensor
- Resolution 2K Ultra HD 2592x1520P@25fps
- Support H.265, H.264, M-JPEG Compression
- 2D/3D Digital Noise Reduction
- Support SD Card for backup
- Support Power over Ethernet / 12Vdc Power Input
- Support iPhone / iPad / Android

#### ◆ Mechanical Dimension

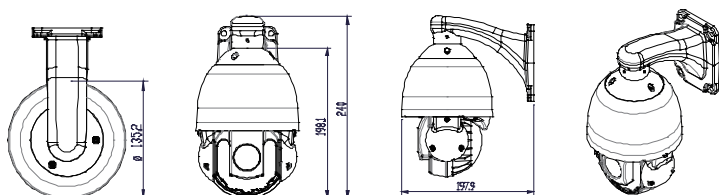

#### ◆ Technical Specifications

Model	ISPD-4065-10X
Image Sensor	1 / 3" 4 Megapixel CMOS Sensor
Video Resolution	2592x1520, 1920x1080, 1280x720, 640x360
Video Frame Rate	2592x1520@25fps, 1920x1080@30fps, 1280x720@30fps, 640x360@30fps
Video Compression	H.265, H.264, M-JPEG
Minimum Illumination	Color:0.08Lux, B/W:0.03Lux, IR LEDs ON:0Lux
DWDR Mode	Off / Low / Middle / High
Day&Night Mode	Auto / Color / B/W / Time Mode with auto ICR
Auto Electronic Shutter	Auto; 1/1 ~ 1/5,000 sec
White Balance	Yes
DNR	2D / 3D
Language	English / Japanese / Chinese (Traditional, Simplified) / Russian / French / Italian / German / Spanish / Polish / Portuguese
Supported Protocols	IPv6, IPv4, HTTP, HTTPS, SNMP, QoS/DSCP, Access list, IEEE802.1X, RTSP, TCP/IP, UDP, SMTP, FTP, PPPoE, DHCP, DDNS, NTP, UPnP, 3GPP, SAMBA, Bonjour
Video Streaming	H.265, H.264 and M-JPEG Quadruple Streaming
Audio Streaming	N / A
Controls ; Auto Pan	PAN / TILT / ZOOM ; Yes
Patrol	8 groups with 24 point
Pan Range	360° Auto Flip
Pan Manual Control Speed	0.45°~90°/sec.
Tilt Range	90° Auto Flip
Tilt Manual Control Speed	0.35°~45°/sec.
Cruise	Yes, 8 groups
Home Position	Yes
Preset Positions	256 Positions
Lens / F value ; Angle of View	f5 ~ 50mm 10x optical zoom / F1.6 ~ F1.8 ; 6.99° ~ 51.04° (H) / 4.17° ~ 30.63° (V)
IR LED ; Working Distance	6 Units High Power ; 70M
Water Resistance	IP66
Power Supply ; Consumption	PoE / DC36V ; PoE: 15W / DC36V: 14.5W
Operating Temp. ; Humidity	-20°C ~ 60°C / 90%
Dimensions / Net Weight	135mm(DIA) x 198mm(H) / 1800g

◆ Specifications are subject to change without prior notice.