


16 Port Web Smart PoE Fast Ethernet Switch




Switch-FE160MP

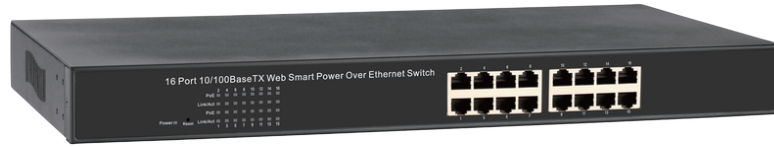

◆ Key Features

- 16-port PoE Ports
- IEEE 802.3af PoE, up to 15.4W per port
- Offers Web-based configuration and management PoE Switch
- Power supply up to 260W
- Support Auto MDI/MDI-X

◆ Mechanical Dimension

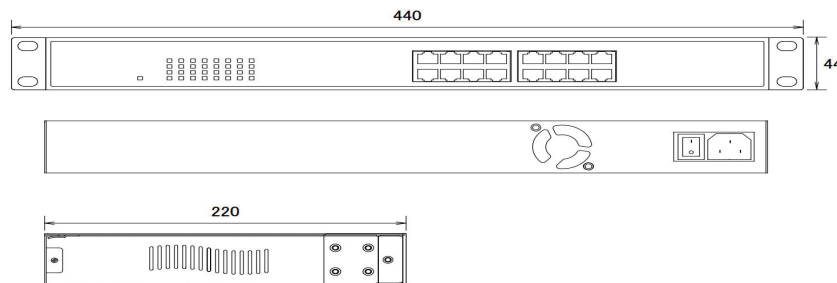

◆ Technical Specifications

Model		Switch-FE160MP
Standard		IEEE 802.3, IEEE 802.3u, IEEE 802.3x IEEE 802.3ad, IEEE 802.1q, IEEE 802.1p, IEEE 802.1x IEEE 802.1d, IEEE 802.1w, IEEE802.3af (PoE)
Interface	RJ45 Total Port	16
	RJ45 PoE Port	16
	SFP Port	N/A
Mac Adress Table Size		4K
Buffer Rate		1.625Mbits
Jumbo Frame		9.6KB
Switching Capacity		1Gbps
Data Transferring Rate		10Mbps / 100Mbps
PoE Standards		IEEE802.3af
Management Level		Web Smart
Forwarding Rate		100Mbps port: 148,800pps, 10Mbps port: 14,880pps
Cable		10Base-T Cat. 3, 4, 5: UTP/STP, 100Base-TX Cat. 5: UTP/STP
Power	Power Input	AC100~240V
	System Power Consumption	12W
LED indicator		Link/Act, PoE Act/Status, Power
PoE Power Consumption		Max 260W
Environment	Operating Temperature / Humidity	0°C ~ +40°C / 10% to 90% RH (non-condensing)
	Storage Temperature / Humidity	-20°C to +90°C / 10% to 90% RH (non-condensing)
Dimensions		44× 220× 440 mm (H x W x D)
Weight		3.8 kg
Certification		CE, FCC Class A

■ Specifications are subject to change without prior notice.