

16 Port Web Smart PoE Gigabit Ethernet Switch with 4 Combo SFP




Switch-G164CMP



◆ Key Features

- 16-port PoE Ports + 4 Gigabit SFP/RJ45 Combo
- IEEE 802.3at/af PoE, up to 30W per port
- Offers Web-based configuration and management PoE Switch
- Power supply up to 235W
- Support Auto MDI/MDI-X

◆ Mechanical Dimension

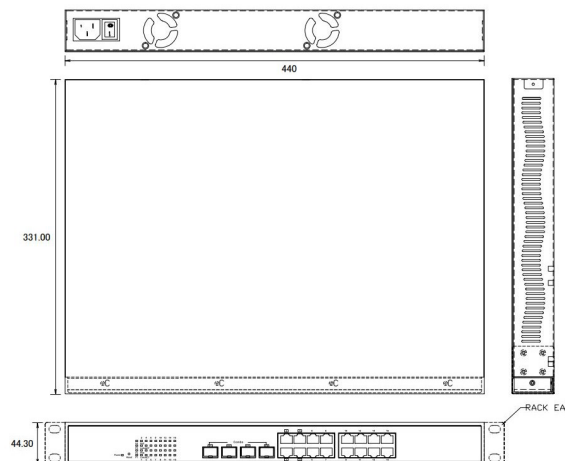

◆ Technical Specifications

Model		Switch-G164CMP
Standard		IEEE 802.3, IEEE 802.3u, IEEE 802.3ab IEEE 802.3z, IEEE 802.3x, IEEE 802.1Q IEEE 802.1p, IEEE 802.3ad, IEEE 802.1w, IEEE 802.1x, IEEE 802.3af (PoE), IEEE 802.3at (PoE+)
Interface	RJ45 Total Port	16
	RJ45 PoE Port	16
	SFP Port	4 (Combo Port)
Mac Adress Table Size		8K
Buffer Rate		500KB
Jumbo Frame		9.6KB
Switching Capacity		32Gbps
Data Transferring Rate		10Mbps / 100Mbps / 1000Mbps
PoE Standards		IEEE802.3af/at
Management Level		Web Smart
Forwarding Rate		1000Mbps port: 1,488,000pps, 100Mbps port: 148,800pps, 10Mbps port: 14,880pps
Cable		10Base-T Cat. 3, 4, 5: UTP/STP, 100Base-TX Cat. 5: UTP/STP 1000Base-T Cat. 5E: UTP/STP
Power	Power Input	AC100~240V
	System Power Consumption	23W
LED indicator		Link/Act, PoE, Power
PoE Power Consumption		Max 235W
Environment	Operating Temperature / Humidity	0°C ~ +40°C / 10% to 90% RH (non-condensing)
	Storage Temperature / Humidity	-20°C to +85°C / 10% to 90% RH (non-condensing)
Dimensions		44 x 440 x 331 mm (H x W x D)
Weight		4.1KG/4.6KG(With Rack Ear)
Certification		CE, FCC Class A

■ Specifications are subject to change without prior notice.