




## Switch-G240



### ◆ Key Features

- └ 24 Port Gigabit Ethernet Switch
- └ Support Auto MDI/MDI-X
- └ Support Non-Blocking
- └ Support Store and Forward

### ◆ Mechanical Dimension

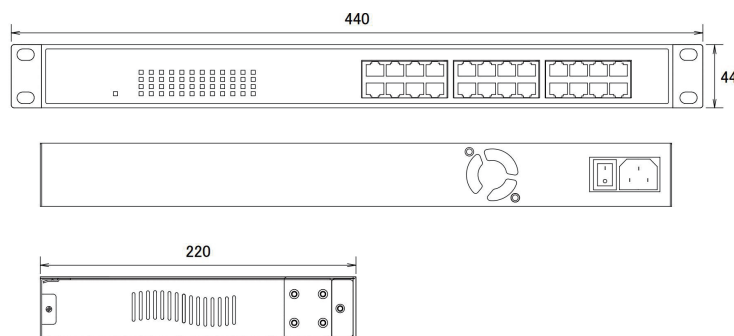

## 24 Port Gigabit Ethernet Switch

### ◆ Technical Specifications

Model		Switch-G240
Standard		IEEE 802.3, IEEE 802.3u, IEEE 802.3ab, IEEE 802.3x
Interface	RJ45 Total Port	24
	RJ45 PoE Port	N/A
	SFP Port	N/A
Mac Address Table Size		8K
Buffer Rate		500KB
Jumbo Frame		9.6KB
Switching Capacity		1Gbps
Data Transferring Rate		10Mbps / 100Mbps / 1000Mbps
PoE Standards		N/A
Management Level		N/A
Forwarding Rate		1000Mbps port: 1,488,000pps, 100Mbps port: 148,800pps, 10Mbps port: 14,880pps
Cable		10Base-T Cat. 3, 4, 5: UTP/STP, 100Base-TX Cat. 5: UTP/STP, 1000Base-T Cat. 5E: UTP/STP
Power	Power Input	AC90~260V
	System Power Consumption	25W
LED indicator		Link/Act, Power, 1000M
PoE Power Consumption		N/A
Environment	Operating Temperature / Humidity	0°C ~ +45°C / 10% to 90% RH (non-condensing)
	Storage Temperature / Humidity	-20°C to +90°C / 10% to 90% RH (non-condensing)
Dimensions		440 × 220 × 44 mm (L x W x H)
Weight		3.0 kg
Certification		CE, FCC Class B

■ Specifications are subject to change without prior notice.