

8 Port Web Smart PoE Gigabit Ethernet Switch with 1 Combo SFP




Switch-G81CMP



◆ Key Features

- 8-port PoE Ports + 1 Gigabit SFP/RJ45 Combo
- IEEE 802.3at/af PoE, up to 30W per port
- Offers Web-based configuration and management PoE Switch
- Power supply up to 235W
- Support Auto MDI/MDI-X

◆ Mechanical Dimension

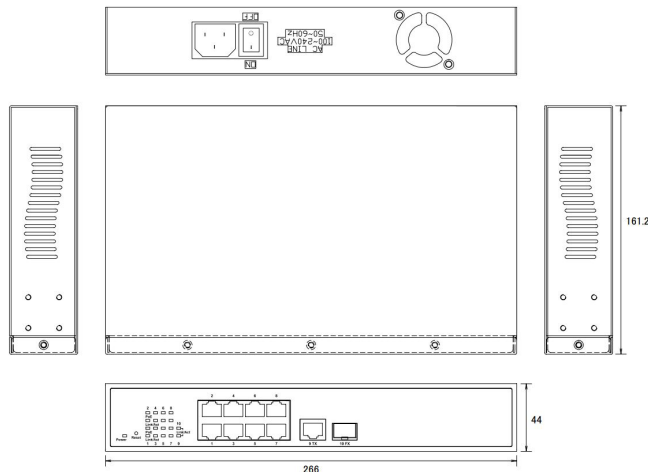

◆ Technical Specifications

Model		Switch-G81CMP
Standard		IEEE802.3, IEEE802.3u, IEEE802.3ab, IEEE802.3z, IEEE802.3x, IEEE802.3ad, IEEE802.1q, IEEE 802.1p, IEEE 802.1X, IEEE802.3af (PoE), IEEE802.3at (PoE+)
Interface	RJ45 Total Port	9
	RJ45 PoE Port	8
	SFP Port	1 (Combo Port)
Mac Address Table Size		8K
Buffer Rate		4Mbits
Jumbo Frame		9.6KB
Switching Capacity		20Gbps
Data Transferring Rate		10Mbps / 100Mbps / 1000Mbps
PoE Standards		IEEE802.3af/at
Management Level		Web Smart
Forwarding Rate		1000Mbps port: 1,488,000pps, 100Mbps port: 148,800pps, 10Mbps port: 14,880pps
Cable		10Base-T Cat. 3, 4, 5: UTP/STP, 100Base-TX Cat. 5: UTP/STP, 1000Base-T Cat. 5E: UTP/STP
Power	Power Input	AC100~240V
	System Power Consumption	10W
LED indicator		Link/Act, PoE, Power, SFP
PoE Power Consumption		Max 235W
Environment	Operating Temperature / Humidity	0°C ~ +45°C / 10% to 90% RH (non-condensing)
	Storage Temperature / Humidity	-20°C to +80°C / 10% to 90% RH (non-condensing)
Dimensions		44 × 266 × 161 mm (H x W x D)
Weight		1.8 kg
Certification		CE, FCC Class B

■ Specifications are subject to change without prior notice.